

PRESIDENT

TEDDY ASC

5 years
warranty
PRESIDENT

ASC Automatic
Squelch
Control



Best price - First Prize **PRESIDENT**

- 5 years warranty • ASC* (Automatic squelch) • AM/FM
- Priority Channel 9/19 • ANL automatic built-in filter
- Switchable key beep • All European standards...

*World patented by PRESIDENT

Groupe

PRESIDENT
ELECTRONICS


S.A. Capital 10.000.000 €

Siège Social / Head Office – France – Route de Sète – BP 100 – 34540 BALARUC

Site : <http://www.president-electronics.com> – e-mail : groupe@president-electronics.com

1185/09-11 C0260



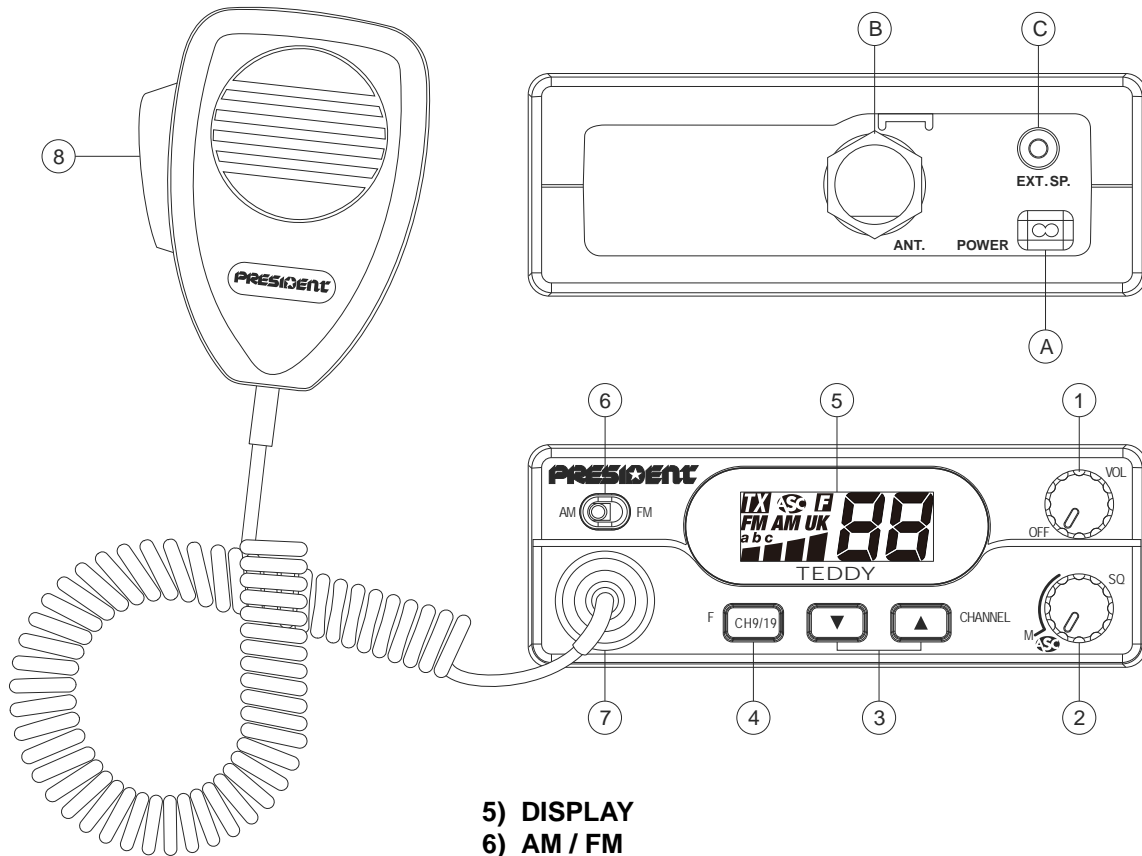

1) ON/OFF – VOLUME

2) ASC (Automatic Squelch Control) / SQUELCH

3) CHANNEL SELECTOR ~ BEEP

4) CH9/19 ~ F

5) DISPLAY

6) AM / FM

7) 6 PIN MICROPHONE PLUG

8) PTT

ANL FILTER (Automatic Noise Limiter)

A) DC-POWER TERMINAL (13,2 V)

B) ANTENNA CONNECTOR (SO-239)

C) EXTERNAL SPEAKER JACK (8 , Ø 3,5 mm)

1187/09-11 C0260b

1) GENERAL

- Channels : 40
- Modulation modes : AM / FM
- Frequency ranges : from 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V
- Dimensions (in mm) : 125 (W) x 170 (D) x 45 (H)
- Weight : ~ 0.6 kg
- Accessories supplied : Electret microphone with support, mounting cradle, screws.
- Filter : ANL (Automatic Noise Limiter) built-in

2) TRANSMISSION

- Frequency allowance : +/- 200 Hz
- Carrier power : 4 W AM / 4 W FM
- Transmission interference : inferior to 4 nW (- 54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adjacent channel : inferior to 20 µW
- Microphone sensitivity : 7 mV
- Drain : 1,8 A (with modulation)
- Modulated signal dist. : 2 %

Specifications

3) RECEPTION

- Maxi. sensitivity at 20 dB sinad : 0.5 µV - 113 dBm
- Frequency response : 300 Hz to 3 kHz
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 2 W
- Squelch sensitivity : minimum 0.2 µV - 120 dBm
maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Inter modulation rejection : 48 dB
- Drain : 600 mA nominal
950 mA maximum



all european standards

